

ZEUS 300W PRO 3.1

The ZEUS 300W PRO 3.1 is a powerful horticulture LED lighting fixture made for hobby and professional grow systems. This fixture has been reoptimized to delivered more light quantity, light quality and turn full cycle grows easier than ever. Equipped with highly efficient light-emitting diodes, the new ZEUS is built for maximum yields and quality crops.



GROW OPTIMAL

BY REQUESTING
A LIGHT PLAN & REPORT



LUMATEK
PROFESSIONAL LIGHTING

3.1 EFFICACY
 $\mu\text{mol}/\text{J}$

965 PPF
 $\mu\text{mol}/\text{s}$



LVD
CERTIFIED

**PLUG
& PLAY**

**CONTROL
TECHNOLOGY**

5 YEAR
WARRANTY



RoHS

**EMI
SUPPRESSION &
EMC
CERTIFIED**

IP65

DESIGNED
& ENGINEERED
BY LUMATEK
IN THE UNITED
KINGDOM



LUMATEK

PROFESSIONAL LIGHTING

PRODUCT SPECIFICATIONS

PRODUCT CODE LUMLED028

LIGHT DISTRIBUTION 120°

LIGHT SOURCE SAMSUNG LM301H EVO | OSRAM 4.24

INPUT VOLTAGE 220-240 V AC, 50/60 Hz

INPUT POWER 312W (± 5%) @ 230 V AC

EFFICACY 3.1 µmol/J @230 V AC

PPF 965 µmol/s

FOOTPRINT 1.2 x 0.6 m

POWER FACTOR 0.95

DIMMING DIMMER (INCL.) OFF-25-50-75-100%

EXTERNAL CONTROL CONTROL PANEL 2.0

OR UNIV. CONTROL 0-10 V

NET WEIGHT 5.9 Kg

DIMENSIONS 1180 x 491 x 70 mm

SPECTRUM FULL SPECTRUM

THERMAL MANAGEMENT PASSIVE

LIFETIME L90 > 60000 hrs

CCT 3600 K

QUANTITY OF LED BARS 3

QUANTITY OF DIODES 1440 WHITE | 36 RED


IP RATING IP65

BTU 1024 BTUS/h

WARRANTY 5 YEARS

CERTIFICATIONS CE, EMC, LVD

ZEUS 300W PRO 3.1 LED

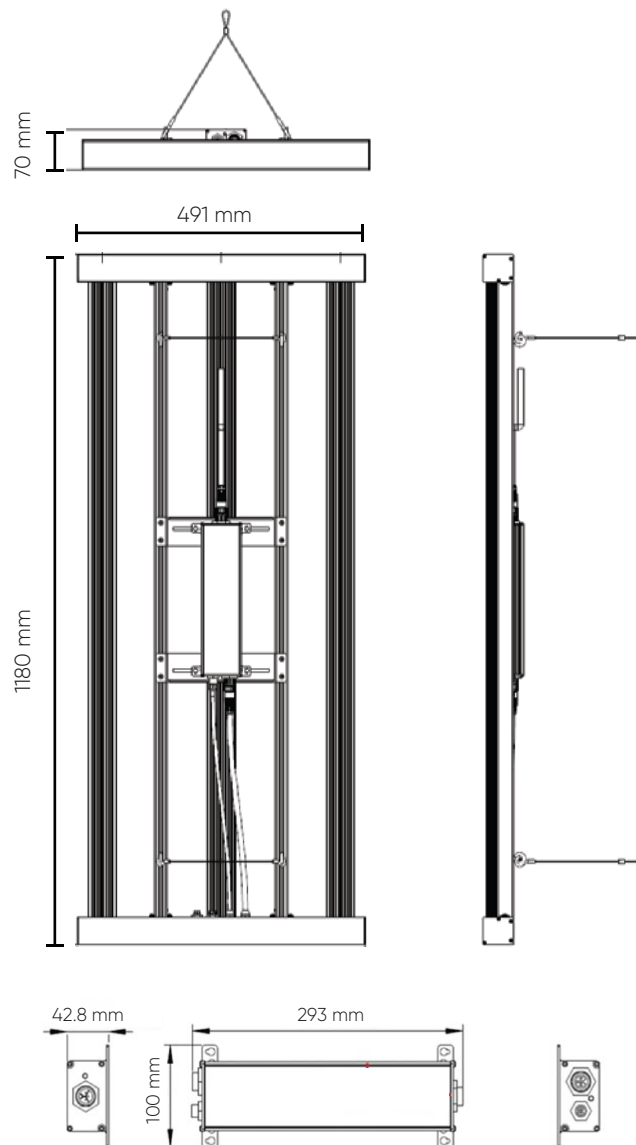

INPUT POWER [W] AND CURRENT [A] PER DIMMING RANGE

@ 240 V

DIMMING	INPUT POWER [W]	INPUT CURRENT [A]
100%	312	1.4
75%	234	1.1
50%	150	0.8
25%	80	0.5

ITEMS INCLUDED IN THE BOX

3 x LUMATEK 100 W PRO 3.1 FULL SPECTRUM BARS

1 x LUMATEK 300 W PRO 3.1 FRAME


1 x LUMATEK 300 W PRO DRIVER

1 x LIGHT DIMMER (OFF-25-50-75-100%)

2 x METAL CABLE HANGERS

1 x MANUAL

SPECTRA

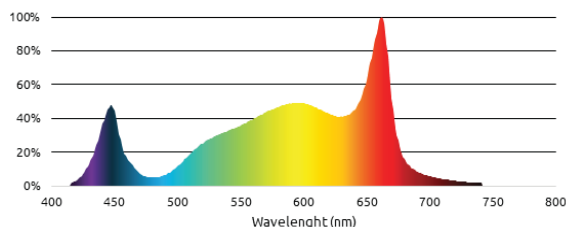

AVAILABLE PARTS


LUMM0034 EU LED POWER PLUG CABLE

LUMM0015 DAISY-CHAIN 5 M CONTROL CABLE

LUMM0016 LED 5 M EXTENSION CABLES 2.0


FLOWERING STAGE

Walls reflection level: High
Distance between fixture and canopy: 30 cm
Canopy PPFD average: 827 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 100% (312 W)

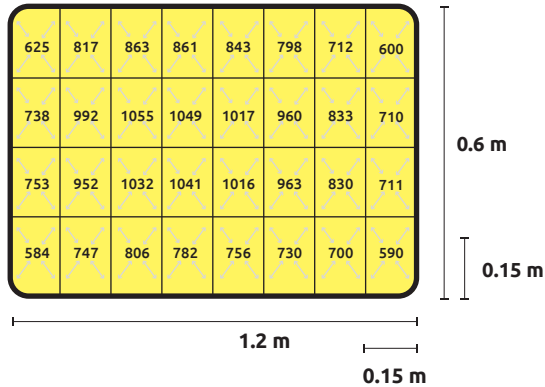


VEGETATIVE STAGE

Walls reflection level: High
Distance between fixture and canopy: 40 cm
Canopy PPFD average: 550 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 75% (234 W)

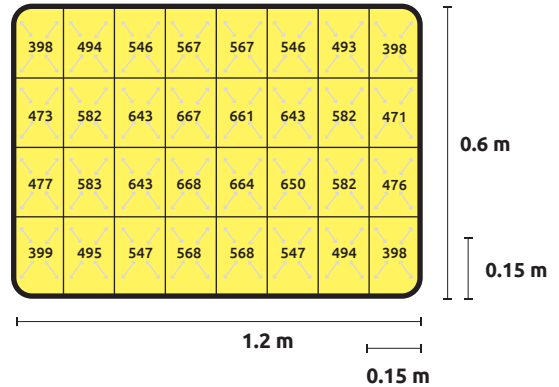


MOTHERS STAGE

Walls reflection level: High
Distance between fixture and canopy: 50 cm
Canopy PPFD average: 460 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 75% (234 W)

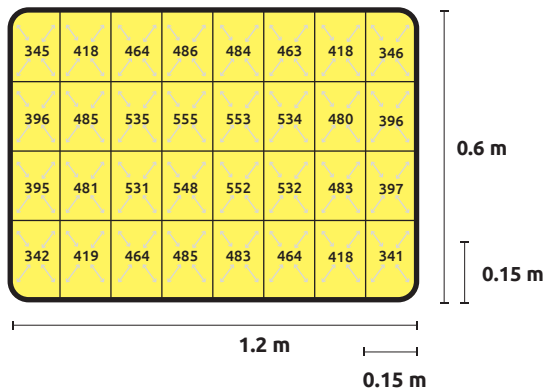

CLONES STAGE

Walls reflection level: High
Distance between fixture and canopy: 70 cm
Canopy PPFD average: 115 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 25% (80 W)

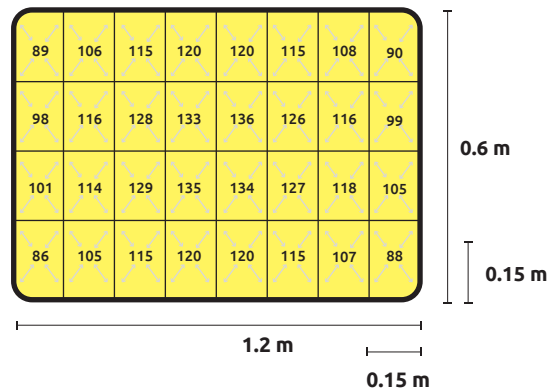

SEEDLING STAGE

Walls reflection level: High
Distance between fixture and canopy: 50 cm
Canopy PPFD average: 154 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 25% (80 W)

